


FLOOR HEATING MAT (FHM-DE-240V-12)

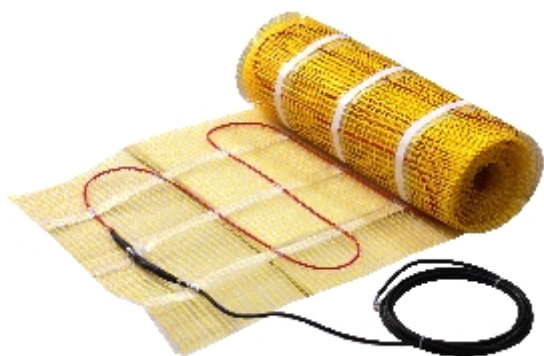

- Heating Cable of 3 w/f
- XLPE Insulation on heating core
- Al Foil Shield with Multi-strand Earth Wire
- Sticky FG Mesh/Non-Sticky FG Mesh/Cross Filament Tape
- Double sided tissue tape / PP tape
- PVC Outer Jacket (Heat Resistance)
- Separate Cold Tail of 3.5 meter.

Construction

Heating Cable	3.0 watt / foot
Spacing	Sticky FG Mesh/ Non-Sticky FG Mesh/ Cross Filament Tape
Core Insulation	ETFE
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	Multi-strand
Jacket	PVC (HR FR)
Power Output per Feet ²	12 Watt / Feet ²
Standard Voltage	240 Volt AC

Range

Model	Watts	Mat Area (Feet ²)
FHM-DE-240V-12-120	120	10
FHM-DE-240V-12-180	180	15
FHM-DE-240V-12-240	240	20
FHM-DE-240V-12-300	300	25
FHM-DE-240V-12-360	360	30
FHM-DE-240V-12-420	420	35
FHM-DE-240V-12-480	480	40
FHM-DE-240V-12-540	540	45
FHM-DE-240V-12-600	600	50
FHM-DE-240V-12-660	660	55
FHM-DE-240V-12-720	720	60
FHM-DE-240V-12-840	840	70
FHM-DE-240V-12-960	960	80
FHM-DE-240V-12-1080	1080	90
FHM-DE-240V-12-1200	1200	100
FHM-DE-240V-12-1320	1320	110
FHM-DE-240V-12-1440	1440	120
FHM-DE-240V-12-1680	1680	140
FHM-DE-240V-12-1920	1920	160
FHM-DE-240V-12-2160	2160	180
FHM-DE-240V-12-2400	2400	200